

MOTOR PERFORMANCE SPECIFICATION

信号线连接

端子号码 TERMINAL NUMBER	信号名 SIGNAL NAME	备注 NOTE
1	VCC	
2	GND	
3	-	
4	BATT	
5	+DO	
6	-DO	
7	-	
8	-	
9	BAT-	
10	FG	

端子号码 TERMINAL NUMBER	信号名 SIGNAL NAME	备注 NOTE
A	U	
B	V	
C	W	
D	FG	

Technical drawing of a shaft with a keyway. The shaft has a diameter of 10h9 and a length of 30. A keyway is shown with a key of width 8 and height 3. The keyway is labeled "鍵槽 P9 Key slot" and "(35h6)". The shaft is labeled "M12深25 Tap:M12 Tap depth:25".





Diagram showing the elevation view of a rectangular block. A horizontal centerline is indicated by a dashed line. A dimension of 60 is shown below the block, indicating its width.

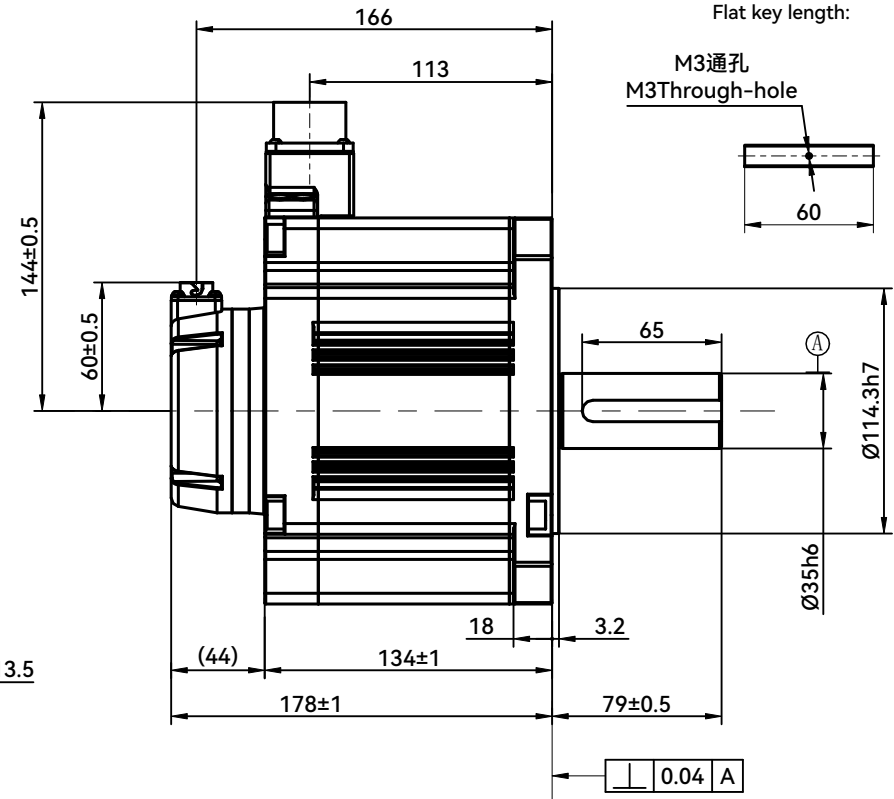

SV-X6MG290S-N4LD

						HCFA 浙江禾川科技股份有限公司 Zhejiang Hechuan Technology Co.,Ltd					
标记 MARK	处 数 NUMBER OF REVISED	分 区 SECTION	更改文件号 REVISED DOCUMENT NUMBER	签 名 SIGNATURE	年 月 日 DATE						
设 计 DESIGN			标 准 化 STANDARDIZATION			阶段标记 STAGE MARKER		重 量 WEIGHT	比 例 SCALE		2900W伺服电机 2900W Servo motor
											SV-X6MG290S-N4LD
审 核 VERIFY											
工 艺 CRAFT				批 准 APPROVE		共 张 第 张 PAGE ,ALTOGETHER PAGE					